

PRODUCT RANGE



LED LIGHTS

Vivid Led Bulb 0.5w

- 85% Energy Saving
- No Harm to Environment.
- Included Components:- Panel Light, Led Driver, Clamps. Can be Installed In Bedroom, Gallery, Kitchen, Office, Hotels And So On.

FR PVC INSULATION TAPE

V-Marc tapes are as per IS 7809 (part 3) the shelf life is 12 months from the date of manufacture

- Thickness : 0.125 + 0.025mm
- Width : 18 + 1 mm
- Tensile strength : 150 N/10mm width per mm thickness (min)
- Adhesion to steel : 1.6 N/10mm width (min)
- Adhesion to backing : 1.3 N/10mm width (min)
- Electric strength at room temp. : 40 kV/mm thickness (min)



DOOR BELL

Ding Dong Bell

- 110-240V
- Available in DC and AC.
- Tones available: Ding Dong , Multi tune , Chirping Parrot

MODULAR SWITCHES

Flame Retardant Thermoplastic Material.

- Robust Design
- Complies with BIS Standards.
- Heavy Metal Contacts for Better Conductivity.
- Glossy and Smooth Finish in White Colours.
- Easy Clean and Easy Installation.

TRAVEL BUDDY

Dual USB Adapter with AC Socket

- 1AC Power Socket
- Imported Intelligent Chip
- 2.4A Total Output
- Dual USB Ports

PRODUCT RANGE



COMBINEBOX

Material FR Polycarbonate UV Stabilized

- Sockets Protected with Safety Shutter
- Switch Spark shield protection
- Switch IP 20 Protections.

HOLDER

Shock proof & Fire retardant material

- Rated Current, 2A
- Rated Voltage 250AC
- Low resistance contact point
- SS spring provided for better flexibility & easy locking for bulb and LED.
- Metal ring



PLUG TOP

Rated Current 6A /16A/25A

- Rated Voltage 240V AC
- 100% Shock proof
- Highly conductive nickel plated contacts
- Material FR Polycarbonate UV stabilized Shock proof & Fire retardant material

POWER BUDDY

Multiple Use & Safety for your Loved ones

- Mobile Holder
- Cord Length 2m
- 2.4 Total USB Output
- 3 USB Ports

NATIONAL PRODUCTIVITY COUNCIL FIRST PRIZE WINNER



PRESTIGIOUS CLIENTS



CUSTOMER SUPPORT NO.
+91 70555-21808



If You Require Any Further Clarification Please Revert To Us For Deputing Our Representative To You Or Visit us at:

V- MARC INDIA LIMITED
Plot No. 3,4,18 & 20 A, Sector - IIDC, SIDCUL, Haridwar, Uttarakhand - 249403
Email : info@v-marc.in Visit : www.v-marc.com

PRODUCT
BROCHURE





V-MARC India Limited (formerly known as Asian Galaxy Private Limited) is one of the leading manufacturers of LT/HT Power, MVCC, Control, Aerial Bunched Cables, Domestic, Industrial, Flexible wires, cables and MCB, RCCB, Distribution Box, Insulation Tape, LED night bulb as per BIS standards.

We have consistently followed a growth path owing to our philosophy of Quality product. Our primary focus has been on customer delight. Our manufacturing unit is well equipped with modern plant & machinery and have complete testing equipment backed up with well qualified and trained personnel, quality systems with ISO 9001:2015 & 14001:2015 accreditation with strong supply line of suppliers i.e., HCL, NALCO, BALCO, HINDALCO, KLJ, KALPENA. Quality is our main objective for all activities at "V-MARC". We adopt stringent control right from the raw material stage up to finished cable with process control during the manufacturing stage. Beside this, we hold BIS license for IS:694:2010, IS: 17048/2018, IS:1554 (Part-1)/1988, IS-7098 (PART 1-1988), IS:14255/1995, IS:7098 (Pt-2):2011, IS:7098 (Pt-3) IS-398 (Pt-2:1996)

CERTIFICATIONS

- For Quality Management System:
ISO: 9001 : 2015 : Certified By : World Wide Standard Certification
- For Environmental Management System:
ISO: 14001 : 2015 : Certified By : LMS Certification
- CE Europe: Certified By : Certiva Limited
- RoHS Compliance : By Accenture International Certification



Our Brand approved by UPCL, UPPCL, MPPKVCL, CSPDCL, UHBVNL, DHBVNL, JSEB, PSPCL, HVPNL, APGENCO, ASPDCL, JKPDD, NBPDC, SBPDCL, BESCOM, TANGEDCO & RECPDCL under Govt. scheme Soubhyaga, IPDS / DDUGJY, RAPDRP, RGGVY, APDRP ADP & Feeder Separation, PMDP as well as Govt. /Semi-Govt. organizations i.e. N.Rly, W.Rly., MP PWD, UKPWD, UP PWD, UP JAL NIGAM, CG PWD, UPRNNL, BSNL, CPWD, MES, SAIL, Jawahar Lal Nehru Port Trust, NLC, BHEL & State Housing Boards, Tata Projects Ltd.

PRODUCT RANGE



HRFR MULTISTRAND

Heat Resistant Flame Retardant Low Smoke With Reduced Halogen Cable Up To 1100 Volt

- Conductor** : Electrolytic grade annealed bare copper with more than 101% conductivity.
- Insulation** : PVC HR(FR/FR-LSH)-85°C
- Product Range** : Up to 300 Sq mm
- Specifications** : IS-694, IS-8130, IS-5831



FR MULTISTRAND CABLES

Flame Retardant Cable Up To 1100 Volt

- Conductor** : Electrolytic Grade annealed bare copper with more than 101% Conductivity.
- Insulation** : PVC -FR 70°C
- Product Range** : Up to 630 Sq mm
- Specifications** : IS-694, IS-8130, IS-5831



FRLSH MULTISTRAND CABLES

Flame Retardant Low Smoke Cable With Reduced Halogen Up To 1100 Volt

- Conductor** : Electrolytic Grade annealed bare copper with more than 101% Conductivity.
- Insulation** : PVC -FR-LSH 70°C
- Product Range** : Up to 300 Sq mm
- Specifications** : IS-694, IS-8130, IS-5831



HF FR (ZH FR) CABLES

Halogen Free Flame Retardant Cables Up To 1100 Volt

- Conductor** : Aluminium/Copper- Class-1/2/5
- Insulation** : HFI-TP70 / HFI-XL70/ HFI-XL90
- Sheath** : HFS-TP70 / HFS-TP90 / HFS-X-70 / HFS-XL 90
- Product Range** :
 - Single Core -- Up to 630 Sq mm
 - 2/3/4 Core -- Up to 300 Sq mm
 - Twenty Five Core -- Up to 2.5 Sq mm
- Specifications** : IS-17048 , IS-8130

PVC MULTICORE CABLES

PVC Round Flexible And Other Cables Up To 1100 Volt


- Conductor** : Aluminium/Copper- Class-1/2/5
- Insulation** : PVC TYPE-A/C/D
- Sheath** : PVC TYPE -ST-1/2/3 (FR/FRLSH)
- Product Range** :
 - Single Core -Up to 630 sq mm
 - 2/3/4 Core -Up to 300 sq mm
 - Twenty Five Core- up to 2.5 sq mm
- Specifications** : IS-694, IS-8130, IS-5831

PRODUCT RANGE



3 CORE FLAT CABLES


- Conductor** : Electrolytic Grade annealed bare copper with more than 101% Conductivity.
- Insulation** : PVC TYPE-A/C/XLPE
- Sheath** : PVC ST-1/2 (FR/FR-LSH)
- Product Range** : Up to 95 sq mm
- Specifications** : IS-694, IS-8130, IS-5831 & Generally IS-7098 (Pt-I)



LT POWER & CONTROL CABLES

Up To 1100 Volt

- Conductor** : Electrolytic Grade Aluminium/Copper(Bare or Tinned) -Class-1/2
- Insulation** : PVC Type-A /C and XLPE
- Armouring** : Strip/Wire (Steel/Alumn)
- Sheath** : PVC ST-1/2 (FR/FR-LSH)
- Product Range** :
 - Single Core - Up to 1000 sq mm
 - 2/3/4 Four Core - Up to 630 Sq mm
 - 61 Core - Up to 2.5 Sq mm
- Specifications** : IS-1554, IS-7098, IS-8130 , IS-5831



D C SOLAR CABLES

- Conductor** : Electrolytic Grade annealed Tinned copper Class-5
- Insulation** : TYPE-C
- Sheath** : UV RESISTANT PVC ST-2
- Product Range** : Up to 400 sq mm
- Specifications** : Generally IS-694, IS-8130, IS-5831



LT/HT A B CABLE

Up To 11 kV (E)

- Conductor** : Electrolytic Grade Aluminium and All Aluminium Alloy
- Insulation** : XLPE/PE
- Sheath** : PVC ST-2/ H D P E
- Product Range** : Up to-185 sq mm bare / insulated messenger
- Specifications** : Generally IS-14255, IS-7098(Pt-2), IS-8130

HT POWER CABLES

Up To 33 kV

- Conductor** : Electrolytic Grade Aluminium/Copper - Class-2
- Insulation** : XLPE
- Armouring** : Strip/Wire (Steel/Alumn)
- Sheath** : PVC ST-1/2 (FR/FR-LSH)
- Product Range** :
 - Single Core - Up to 1000 sq mm
 - Three Core - Up to 400 Sq mm
- Specifications** : IS-7098(Pt-2), IS-8130 ,IS-5831

PRODUCT RANGE



COXIAL CABLES

- High Quality Co- Axial Cable for TV Network.
- Low Attenuation Value.
- Low Loss in Signal Quality
- High Band Width
- Long Life
- Product Range** : RG-6
- Conductor** : Solid Annealed Bare Copper.



TELEPHONE SWITCHBOARD CABLES

- Designed for Voice Clarity and Elimination of cross talk.
- Low Attenuation Value.
- High Speed Transmission.
- Long Life
- Product Range** : 1 Pair Upto 20 Pair
- Conductor** : Bright Annealed Pure Electrolytic Copper.



MEDIUM VOLTAGE COVERED CONDUCTOR

- Conductor** : AAAC, AAAC AL-59 : AAAC, Al59 ACS (Water Tight Conductor)

Insulation : XLPE

Sheath : UV Resistant, Anti -Tracking XLPE

Specifications : IS- 398(Pt-4) EN-50397-1, SS- 4240813 & SS-4240814



CCTV CABLES

- High Quality & Reliable Transmission of Voice, Video & Data.
- Highly Shock Proof & Durable.
- Product Range** : CCTV3+1, CCTV4+1
- Conductor** : Flexible Bare Copper



LAN CABLES


CAT 6 Data Cables

- Low Attenuation

Conductor : Solid Annealed Bare Copper.

Specification : EN-50173, IEC-11801 & TIA/EIA 568 B-2

PRODUCT RANGE

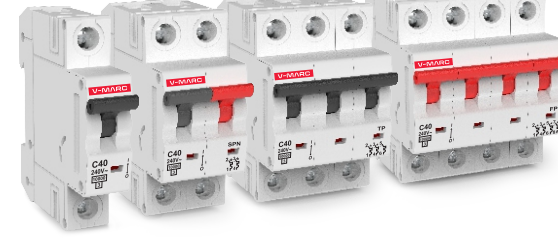


MINIATURE CIRCUIT BREAKER

Miniature Circuit Breaker MCB- Protect against over load & short circuit fault of 10kA

Range: 06A - 63A
Execution: Single Pole, Single Pole + N, Double Pole, Three Pole, Three Pole + N, & Four Pole.
Specification: IS/IEC60898

Smart Features & Benefits:

- High short-circuit switching capacity
- Low let-through energy
- Longer electrical life through precisely controlled thermal and magnetic tripping
- Mid knob design for speedy action.
- Positive contact indicator.
- Operating temperature - 30°C to 70°C.



RESIDUAL CURRENT CIRCUIT BREAKER

Residual Circuit Breaker RCCB- Statik Series
Range: 06A - 63A
Execution: Double Pole, Four Pole
Specification: IS/I2640 , IEC/ 61008

Smart Features & Benefits:

- For humans, fire protection against earth leakage.
- Current sensing technology
- AC class protection
- Earth fault indicator & test button

DISTRIBUTION BOX



Smart Features & Benefits:

Enhanced Aesthetics:

- The aesthetically designed front fascia of the DB adds an alluring dimension to the living space.
- A distribution board that you no longer need to hide.
- Marking on sides for perfect installation.
- Power coated, aesthetically common design.